


## Pfirst Series™ Tub And Shower Trim

- |  |  |
|--|--|
| R89-O100 Finish(C) <input type="checkbox"/>  | LG89-O20K Finish(K) <input type="checkbox"/> |
| R89-O10K Finish(K) <input type="checkbox"/>  | LG89-O20Y Finish(Y) <input type="checkbox"/> |
| R89-O10Y Finish(Y) <input type="checkbox"/>  | LG89-O300 Finish(C) <input type="checkbox"/> |
| LG89-O200 Finish(C) <input type="checkbox"/> | LG89-O30K Finish(K) <input type="checkbox"/> |
|  | LG89-O30Y Finish(Y) <input type="checkbox"/> |

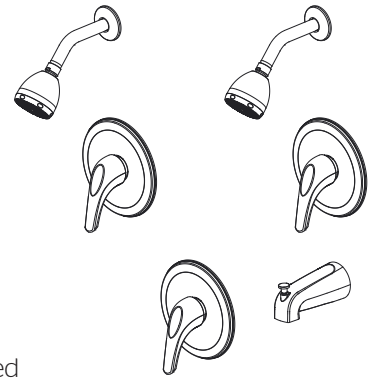

## Specifications

- Trim Only, Valve Not Included

### Features

- 1.8 GPM Flow Rate (Showerhead)
- Trim Only, Valve Not Included
- Quick Trim Installation- Attaches Without Tools, No Exposed Screws
- Requires OX8 or JX8 Valve Bodies
- Easy to Clean Nozzles
- Tub & Shower (O30\* Only)
- Shower Only (O20\* Only)
- Handle Trim Only (O10\* Only)
- Metal Shower Arm and Flange
- Quick Connect Tub Spout (O30\* Only)
- 1.5 GPM Shower Head Low Flow Restrictor Available: Order Part # 941-O55 Orange Colored Restrictor Separately
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.8 gpm, 6.8 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

