

## 278


30 Amp, 125/250 Volt, NEMA 14-30R, 3P, 4W, Flush Mtg Receptacle, Straight Blade, Industrial Grade, Grounding, Side Wired, Steel Strap, - Black

Built of durable thermoplastic, Leviton Power Receptacles — come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings.



**UPC Code :** 07847707451

**Country Of Origin :** Please Contact Customer Service.



### Technical Information

#### AC Horsepower Ratings

**At Rated Voltage :** 2 HP

#### Electrical Specifications

**Amperage :** 30 A

**Current Limiting :** Full Rated Current

**Dielectric Voltage :** Withstands 2000V per UL498

**Grounding :** Grounding

**Pole :** 3

**Temperature Rise :** Max 30C after 50 cycles OL at 150 percent rated current

**Voltage :** 125/250 VAC

**Wire :** 4

#### Environmental Specifications

**Flammability :** Rated V-2 per UL 94

**Operating Temperature :** -40°C to 60°C

#### Material Specifications

**Body Material :** Nylon

**Color :** Black

**Face Material :** Nylon

**Line Contacts :** Brass Double-Wipe

**Strap Material :** Galvanized Steel

#### Mechanical Specifications

**Product ID :** Ratings are permanently marked on device

**Terminal Accom. :** Up to 4 AWG

**Terminal ID :** Brass-Hot, Green-Ground, Silver-Neutral

#### Product Features

**Amperage :** 30 A

**Color :** Black

**Device Type :** Power Device

**NEMA :** 14-30R

**Voltage :** 125/250 VAC

#### Standards and Certifications

**ANSI :** C-73


**CSA C22.2 No. 42 :** File 152105

**NEMA :** WD-6


**NOM :** 057

**UL498 :** File E13399

**Warranty :** 10-Year Limited

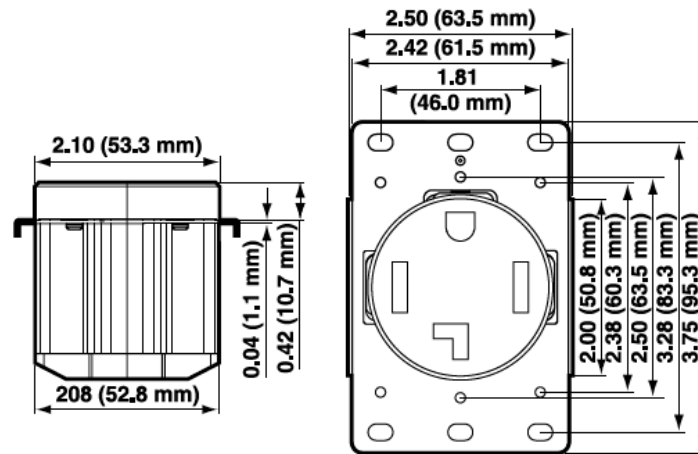

### Wiring Diagram

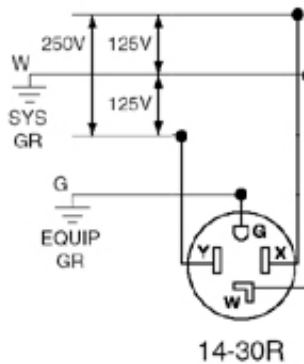

### SPECIFICATION SUBMITTAL

|                      |                      |                      |
|----------------------|----------------------|----------------------|
| JOB NAME:            | CATALOG NUMBERS:     |                      |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| JOB NUMBER:          | <input type="text"/> | <input type="text"/> |

#### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

#### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

#### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

