

# 2613



UPC Code : 078477807873

Country Of Origin : United States



Available Colors :



Black



Yellow-White

Locking Connector, 30 Amp, 125 Volt, Industrial Grade - Black & White

30 Amp, 125 Volt, NEMA L5-30R, 2P, 3W, Locking Connector, Industrial Grade, Grounding - Black/White

Leviton's Black & White line of industrial grade plugs, connectors, flanged inlets, and outlets offer superior performance, long lasting reliability and features that are backed by a lifetime warranty:

- One piece contacts reduce friction and overheating
- Unique cord clamp accepts wide range of cord sizes (.245"-.700")
- Rugged nylon construction resists impact, sunlight, chemicals, and rough use
- Industry exclusive lifetime warranty
- Made proudly in the USA

## Technical Information

AC Horsepower Ratings

**At Rated Voltage** : 2 HP

Electrical Specifications

**Amperage** : 30 A

**Current Interrupting** : Certified for current interrupting at full rated current

**Dielectric Voltage** : Withstands 2000V per UL498

**Grounding** : Grounding

**Pole** : 2

**Temperature Rise** : Max 30C after 250 cycles OL at 200 percent rated current

**Voltage** : 125 VAC

**Wire** : 3

Environmental Specifications

**Environment** : Dry

**Flammability** : Rated HB or better UL94

**Operating Temperature** : -40°C to 60°C

Material Specifications

**Assembly Screws** : Steel, Zinc Plated

**Back Cover** : Thermoplastic

**Blades/Contacts** : Solid Brass

**Body Material** : Impact Modified Nylon

**Clamp Insert** : Nylon

**Color** : Black-White

**Cord-Clamp** : Nylon

**Terminal Screws** : Brass

**Wire Module** : Nylon

Mechanical Specifications

**Cord Range** : 0.520 to 0.930

**Product ID** : Ratings are permanently marked on device

**Terminal Accom.** : 18-10 AWG

**Terminal ID** : Brass-Hot, Green-Ground, Silver-Neutral

**Wire Gauge** : 16-8 AWG

Product Features

**Brand** : Black and White

**Color** : Black-White

**Device Type** : Locking Connector

**NEMA** : L5-30R

Standards and Certifications

**ANSI** : C-73

**CSA C22.2 No. 42** : File LR-406

**NEMA** : WD-6


**NOM** : 057

**UL Fed Spec WC-596** : File E13393

**UL498** : File E13393

**Warranty** : Limited Lifetime Warranty

## Dimensional Diagram

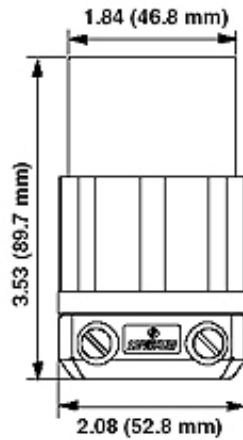

## SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):  
+1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·  
FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-  
1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

