




## 860 Series Class 125 Y-Strainer, NPT Threaded Type

## **SPECIFICATIONS**

• WORKING PRESSURE: 200 PSI

• TEST PRESSURE: SHELL – 2.4 MPA SEAT – 1.76 MPA

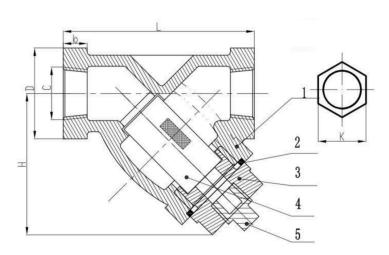



## **COMPONENTS**

NO.	PART NAME	MATERIAL	ASTM SPECIFICATIONS	
1	BODY	CAST IRON	ASTM A126 CLASS B	
2	SCREEN	STAINLESS STEEL	ASTM SS304	
3	GASKET	O-RING OR GRAPHITE	BRASS	
4	BONNET	CAST IRON	ASTM A126 CLASS B	
5	PLUG	CAST IRON	ASTM A126 CLASS B	

DIMENSIONS (INCHES								
SIZE	L	С	D	b	Н	K		
1/2"	2.99	NPT 1/2"	1.65	0.39	2.05	1.43		
3/4"	4.02	NPT 3/4"	1.89	0.59	2.56	1.64		
1"	4.88	NPT 1"	2.28	0.59	3.19	1.98		
1 1/4"	5.20	NPT 1 1/4"	2.87	0.63	3.82	2.54		
1 1/2"	5.75	NPT 1 1/2"	3.23	0.63	4.06	2.80		
2"	7.24	NPT 2"	3.94	0.98	4.61	3.41		
2 1/2"	9.02	NPT 2 1/2"	4.65	1.10	5.71	4.02		
3"	10	NPT 3"	5.35	1.18	6.77	4.61		

All information contained herein is supplied by manufacturer and deemed to be accurate. Information is subject to change without notice. Purchaser is responsible for proper installation, use and maintenance of product. Southern Valve & Fitting USA, Inc. passes on manufacturer's warranty but extends no other warranty. All products sold by Southern Valve & Fitting USA, Inc. are subject to its full terms and conditions of sales as published and available on request. Any warranty made extends to original purchaser and is not assignable or transferable.