




Z100

15 [381] DIAMETER MAIN ROOF DRAIN LOW SILHOUETTE DOME

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

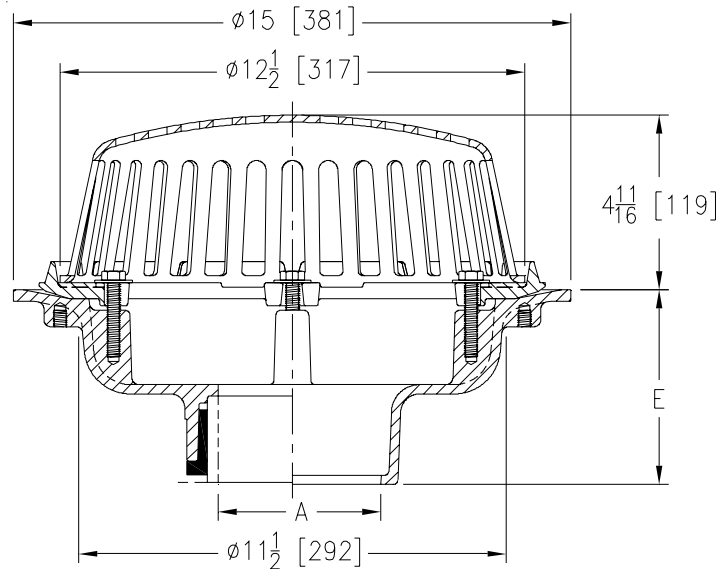

A Pipe Size In.	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	26 [12]	103 [665]
5,6 [127,152]	27 [12]	
8 [203]	28 [13]	

ENGINEERING SPECIFICATION: ZURN Z100

15 [381] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and low silhouette Poly-Dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6,8 [51 thru 152,203]
2 thru 6,8 [51 thru 152,203]
2 thru 6,8 [51 thru 152,203]
2,3,4 [51,76,102]
6 [152]

(Specify size/type) OUTLET

_____ IC Inside Caulk
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc
_____ NL Neo-Loc

EBODY HT. DIM.

5 1/4 [133]
3 3/4 [95]
5 1/4 [133]
4 9/16 [116]
5 7/16 [112]

PREFIXES

_____ Z D.C.C.I. Body with Poly-Dome*
_____ ZA D.C.C.I. Body with Aluminum Dome
_____ ZC D.C.C.I. Body with Cast Iron Dome
_____ ZRB D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

_____ -AC Angular Underdeck Clamp
_____ -AR Acid Resistant Epoxy Coated
_____ -AW 3/4 [19] to 4 [102] Adj. Water Level Regulator
(Specify Height) (ZC Only)
_____ -BS Bronze Mesh Screen Over Dome
_____ -C Underdeck Clamp
_____ -DE Deck Extension
_____ -DP Top-Set® Deck Plate (Replaces both the -C and -R)
_____ -DR Top-Set® Drain Riser
_____ -DX Dex-o-tex Flange
_____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
_____ -EA Adjustable Extension Assembly
2 1/8 [54] thru 3 1/2 [89]
_____ -EB Top-Set® Adjustable Extension Assembly
_____ -FG Flush Grate (Replaces Dome Strainer)
_____ -G Galvanized Cast Iron
_____ -GD Galvanized Cast Iron Dome (ZC Only)
_____ -HD 6 3/4 [171] High Aluminum Dome Strainer
(148 Sq. In. [955 cm²] Open Area) (ZA Only)

_____ -R Roof Sump Receiver
_____ -SC Secondary Clamp Collar
_____ -SS Stainless Steel Mesh Screen Over Dome
_____ -ST Dome with Solid Top (ZA, ZC & ZRB Only)
_____ -TC Neo-Loc Test Cap Gasket
(2 - 4 [51 - 102] NL Bottom Outlet Only)
_____ -VP Vandal-Proof Secured Top
_____ -W2 2 [51] Internal Water Dam
_____ -W3 3 [76] Internal Water Dam
_____ -W4 4 [102] Internal Water Dam
_____ -84 Stainless Steel Perforated Gravel Guard
_____ -85 Stainless Steel Perforated Extension
_____ -89 2 [51] High External Water Dam
_____ -90 90° Threaded Side Outlet Body
(2 thru 6 [51 or 152])

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. M DATE: 2/28/08 C.N. NO. 98161

DWG. NO. 59285 PRODUCT NO. Z100

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292