

2441



UPC Code : 078477808269

Country Of Origin : United States

RoHS Compliant : Yes



Locking Plug, 20 Amp, 120/208 Volt, Industrial Grade, Black & White

20 Amp, 120/208 Volt 3-Phase Y, NEMA L18-20P, 4P, 4W, Locking Plug, Industrial Grade, Non-Grounding - BLACK-WHITE

Leviton's Black & White line of industrial grade plugs, connectors, flanged inlets, and outlets offer superior performance, long lasting reliability and features that are backed by a limited lifetime warranty:

- One piece contacts reduce friction and overheating
- Unique cord clamp accepts wide range of cord sizes
- Rugged nylon construction resists impact, sunlight, chemicals, and rough use
- Industry exclusive limited lifetime warranty
- Made proudly in the USA

Technical Information

Mechanical Specifications

At Rated Voltage : 2 HP
Cord Range : .595 - .895
Product ID : Ratings are permanently marked on device
Terminal Accom. : 18-10 AWG
Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral
Torque Range : 10-14 in-lbs
Wire Gauge : 14-10 AWG

Electrical Specifications

Amperage : 20 A
Current Interrupting : Certified for current interrupting at full rated current
Dielectric Voltage : Withstands 2000V per UL498
Grounding : Non-Grounding
Phase : 3-Phase WYE
Pole : 4
Temperature Rise : Max 30C after 250 cycles OL at 200 percent rated current
Voltage : 120/208 VAC
Wire : 4

Environmental Specifications

Environment : Dry
Flammability : Rated HB or better UL94
Operating Temperature : -40°C to 60°C

Material Specifications

Assembly Screws : Steel, Zinc Plated
Back Cover : Thermoplastic
Blades/Contacts : Solid Brass
Body Material : Impact Modified Nylon
Clamp Insert : Nylon
Color : Black-White
Cord-Clamp : Nylon
Terminal Screws : Brass
Wire Module : Nylon

Product Features

Brand : Black and White
Color : Black-White
Device Type : Locking Plug
NEMA : L18-20P



Standards and Certifications

ANSI : C-73
CSA C22.2 No. 42 : File LR-406
NEMA : WD-6
NOM : 057
UL Fed Spec WC-596 : File E13393
UL498 : File E13393
Warranty : Limited Lifetime Warranty

Cat No: 2441



Upper Value: INCH
Lower Value: mm

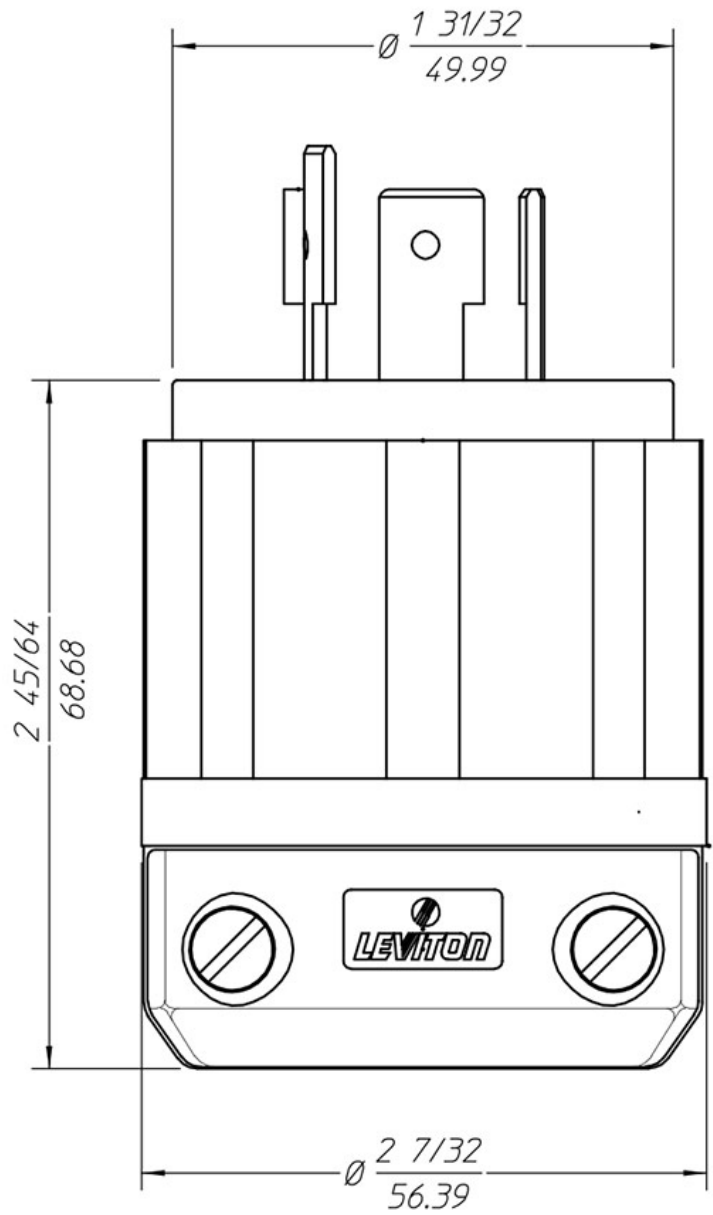

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

